


THE INSTALLED CHAMBER SYSTEM SHALL PROVIDE THE LOAD FACTORS SPECIFIED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS SECTION 12.12 FOR EARTH AND LIVE LOADS, WITH CONSIDERATION FOR IMPACT AND MULTIPLE VEHICLE PRESENCES.

GRANULAR WELL GRADED SOIL/AGGREGATE MIXTURES, <35% FINES, COMPACT IN 6" [152 mm] LIFTS TO 95% PROCTOR DENSITY. SEE THE TABLE OF ACCEPTABLE FILL MATERIALS

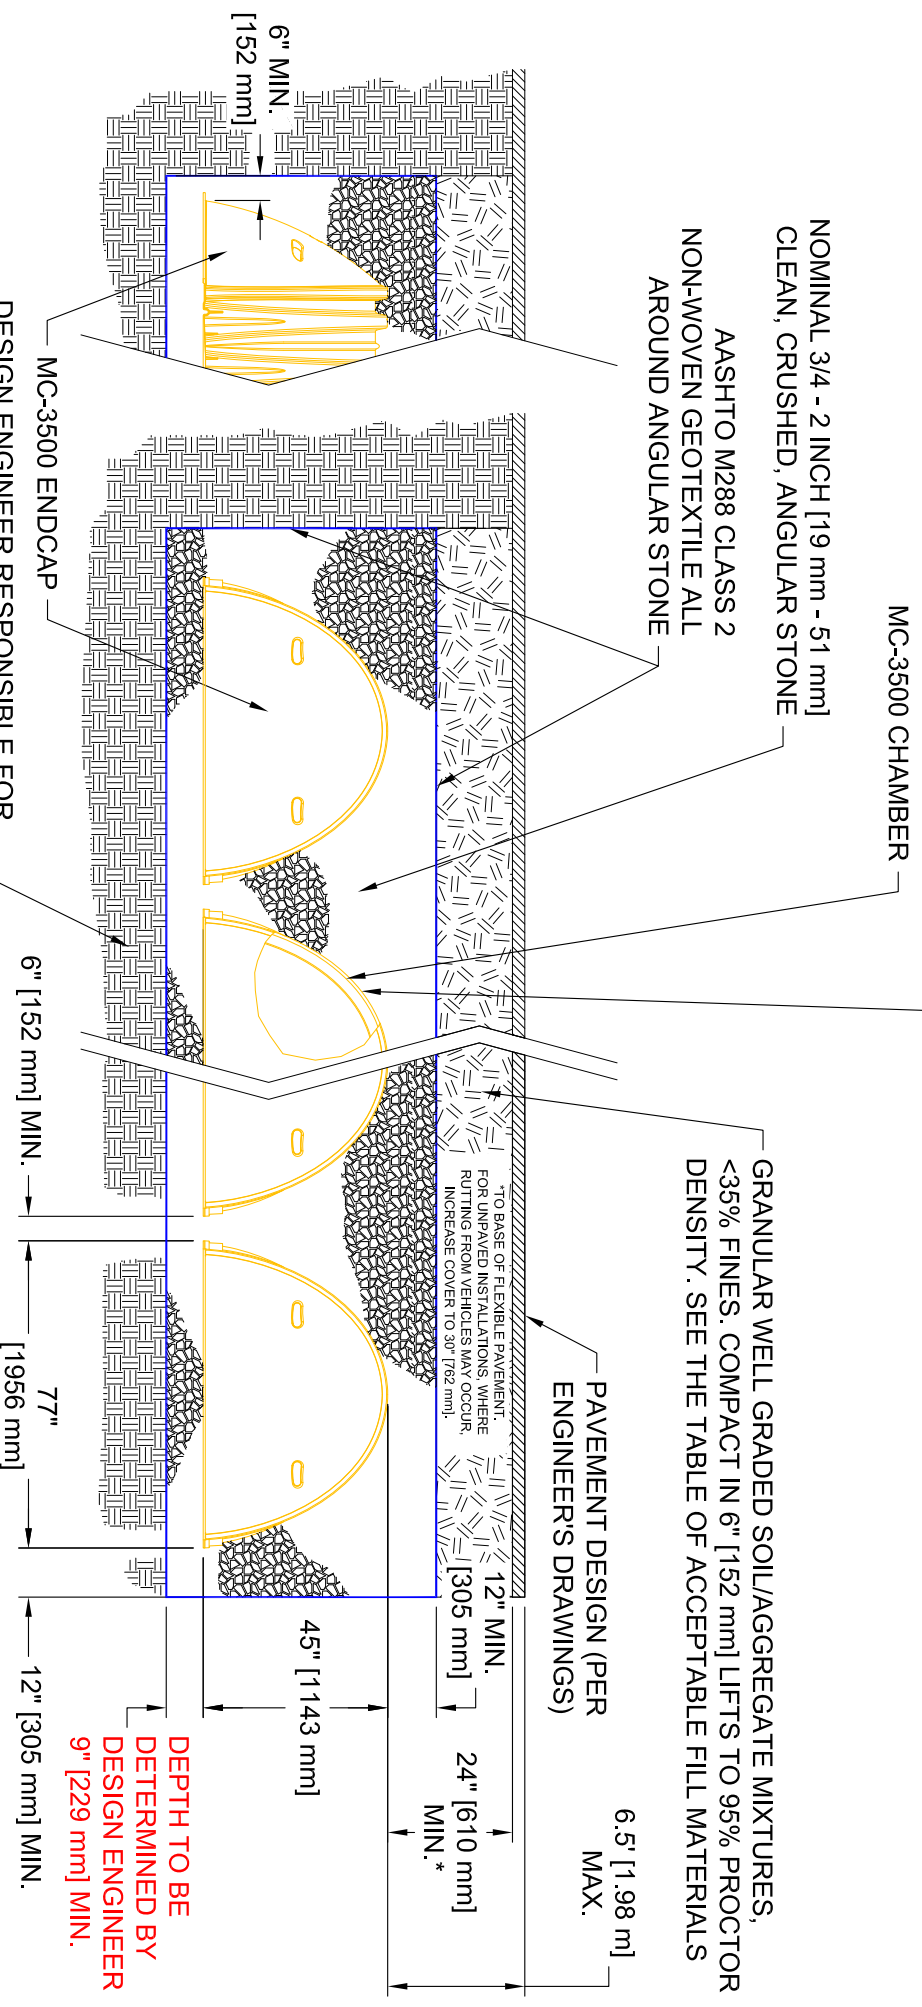

MC-3500 TYPICAL CROSS-SECTION

SCALE:	NTS
DATE:	7-17-09
DRAWN BY:	JLM
CHECKED:	

STORMTECH STANDARD DETAIL DISCLAIMER
 STORMTECH STANDARD DETAIL'S DEMONSTRATE RECOMMENDATIONS FOR INSTALLATION AND/OR STANDARD DIMENSIONS OF STORMTECH PRODUCTS. STORMTECH DETAIL'S DO NOT SUPERSEDE ANY STATE OR LOCAL REGULATORY SPECIFICATIONS. IT IS THE RESPONSIBILITY OF THE CONSULTING ENGINEER TO ENSURE COMPLIANCE WITH ALL REGULATORY SPECIFICATIONS. STORMTECH HAS NOT AUTHORIZED, AND IS NOT RESPONSIBLE FOR ANY ALTERATIONS BY OTHERS TO STORMTECH STANDARD DETAILS.



StormTech
 Division of Environmental Management
 Subsurface Stormwater Management
 20 BEAVER ROAD, SUITE 104
 WETHERSFIELD, CT 06109
 PHONE: 866-892-2694
 FAX: 866-328-9401
 WWW.STORMTECH.COM